



Catalogue
LAUNDRY
Chapter
WASHING

Model
LN-60 TP2 S 400V 3N 50/60Hz

18001943

12/05/2020

NORMAL SPIN WASHER EXTRACTOR, LN-60 TP2 S

- Unit exterior manufactured in skin plate, colour grey, stainless steel appearance. Easy to clean and anti fingerprint.
- Drum and jacket in AISI-304 stainless steel.
- 8 automatic liquid dosing signals, with programmable time and delay. 6 extra signals available optionally.
- 3 standard water inlets.
- Variable-frequency drive (standard 50-60 Hz). Balancing system controlled by the same drive.
- New second-generation TOUCH PLUS programmer with 7" touch screen, 37 available languages and which lets you create an indefinite number of programs (29 pre-set), even play videos.
- Traceability as standard: the whole wash process (temperatures, water levels) is stored on the washer and is extractable to a PC by USB memory.
- Allows programming, importing and exporting of programs and software updates via USB.
- WET CLEANING characteristics included in the scheduler (modifiable water levels and washing speed).
- EFFICIENT MIX. These machines are equipped with an automatic water mixer (mixing different water temperatures) which provides energy savings and reduces washing times.
- BALANCE CONTROL. The washers detect the imbalance at an early stage. This way the operation is much smoother, elongating components lifetime and reducing washing times, thus saving energy as well.
- MULTICHOICE INLET. All washers are equipped with a third water inlet as standard, which allows you to save filling time, or which can be used for decalcified water, ozone or recycled water.
- MAINTENANCE KARE. A simple and reliable design with easy-to-access mechanical parts.
- OPTIMIZED DRUM. The effective design of the drum and tank allows the energy consumption necessary to heat the water, as well as the superfluous use of chemical products, to be reduced.
- OPTIMAL CONSUMPTION: Efficient system by means of which you can indicate the load which is introduced in the machine. The washer automatically adapts the quantity of water and chemicals to be used for that load.
- LOADING AID system. Water inlet and spin control for loading the linen.
- CE, WRAS and EAC product certifications.
- Optional ETL-certified version of the machine.
- Tank with 4 detergent compartments.
- The standard model can be converted to self-service by installing a pay station kit, coin mechanism kit or other payment system. RS-485 communication.
- Washers compatible with water recovery tanks.
- Maximum water consumption calculated in Programme nr. 20, 75% of loading.

ANCHORAGE TO THE FLOOR

- These machines need to be anchored to the floor.
- FAGOR offers anchoring bases specific to each model, which must be ordered separately.

OPTIONS:

- Reversible door.
- Automatic unblockage of the door.
- Tropicalised programmer.
- Printer

DIMENSIONS



X Width	1225 mm	X Gross width	1360 mm
Y Depth	1279 mm	Y Gross depth	1480 mm
Z Height	1640 mm	Z Gross height	1880 mm
Net Weight	930,0 kg	Gross Weight	1,050,0 kg
Net volume	2,570 m3	Gross volume	3,784 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Engine power	5,50 kW
Electric power	5,500 kW
Amperage (A)	15,5
Voltage	400V - 3N
Electric frequency	50/60Hz

STEAM TECHNICAL SPECIFICATIONS

Steam consumption	21,00 kg/h
-------------------	------------

WATER TECHNICAL SPECIFICATIONS

Pressure	H2O: 200-400kPa(2-4bar)
Water max consumption	627,90 l/h

CONNECTIONS TECHNICAL SPECIFICATIONS

Three-phase +N 400V wiring	4X2,5+T 20A
Steam entrance diameter	3/4"
Water inlet diameter	3/4"
Drain 1 diameter	3"
Drainage capacity	200 l/min

OTHERS

Load capacity 1/9	67,00 kg
Load capacity 1/10	60,00 kg
Drum volume	600 L
Drum diameter	1048 mm
Drum depth	684 mm
Wash speed	42,5 r.p.m.
Max revolutions	505 r.p.m.
G Factor	150
Fuerza máxima transmitida (kN)	9,12 ±15
Frequency of dynamic load (Hz)	6,93
Self-service	No
Noise level	< 70,00 dB





Catalogue
LAUNDRY

Chapter
WASHING

Model
LN-60 TP2 S 400V 3N 50/60Hz

18001943

12/05/2020

- Recirculation.
- SLUICE option.
- Extra dosage.
- Stainless steel unit.
- Stainless steel front.
- Drain normally closed.
- Double drain.

Door position:

Height door centre: 900 mm

Height door base: 540 mm

"Working diameter of the door: 560 mm

"




Catalogue
LAUNDRY

Chapter
WASHING

Model
LN-60 TP2 S 400V 3N 50/60Hz

18001943

12/05/2020

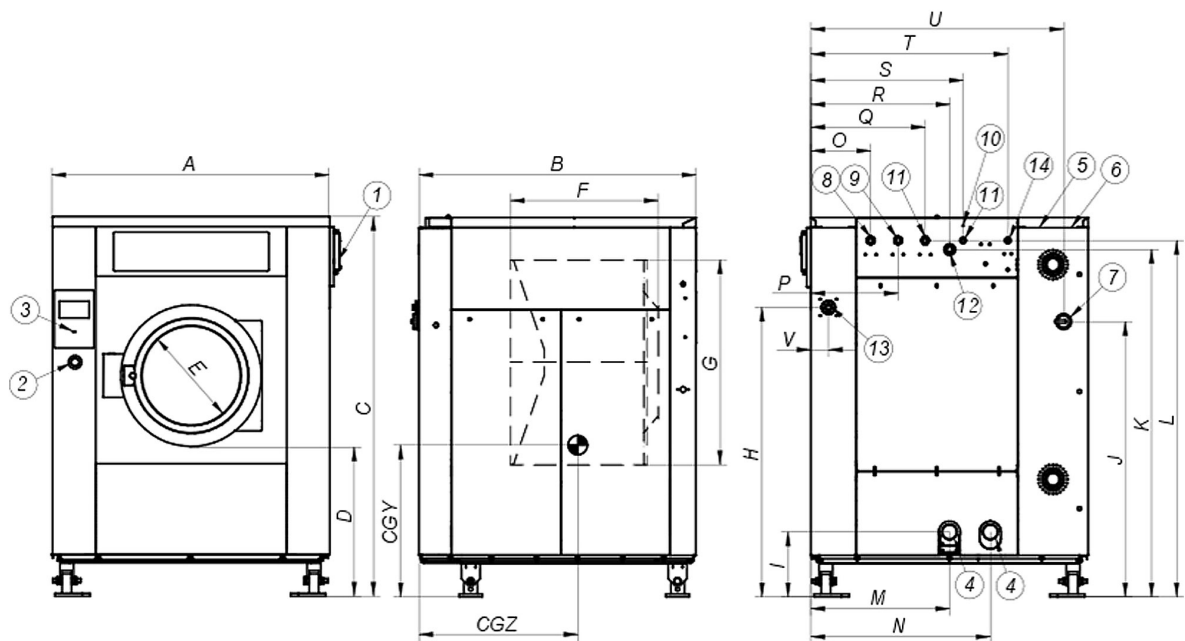

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LN-60 TP2	1.225	1.279	1.640	540	560	140	984	1.368	1.536	1.306	1.551	1.318	61	74	101	651	731	1.110	869	270	1.163	1.080	1.470	992	1.595	644	972

- | | |
|--|--|
| 01. Jabonera | 01. Detergent box |
| 02. STOP paro de emergencia | 02. STOP Emergency button |
| 03. Puerto USB | 03. USB port |
| 04. desagüe | 04. Drain |
| 05. Conexión eléctrica a bombas de jabón líquido | 05. Electrical connection for soap dispenser |
| 06. Conexión eléctrica | 06. Electrical inlet |
| 07. Interruptor general | 07. Main switch |
| 08. Entrada de agua auxiliar | 08. Auxiliary water inlet |
| 09. Entrada de agua caliente | 09. Hot water inlet |
| 10. Toma de tierra | 10. Ground connection |
| 11. Entrada de agua fría | 11. Cold water inlet |
| 12. Rebosadero de agua | 12. Overflow |
| 13. Conexión para jabón líquido | 13. Connection for liquid soap |
| 14. Conexión de vapor | 14. Steam inlet |